

## CNBM Solar Polycrystalline Series IV (85W)

### Characteristics

Max Power Voltage Vmp (V)	18.0V
Max Power Current Imp (A)	4.72A
Open Circuit Voltage Voc (V)	22.6V
Short Circuit Current Isc (A)	4.95 A
Max Power Pm (W)	85 W


### Temperature Coefficient of Cells

NOCT	47°C ± 2°C
Temperature Coefficients of Isc (%/°C)	+0.06%
Temperature Coefficients of Voc (%/°C)	-0.33%
Temperature Coefficients of Pmp (%/°C)	-0.45%

### Mechanical Data

Type of Cells(mm)	Poly156x22.2
Dimension	920x670x30mm
Weight	7.5kg
NO. of Cells and Connections	36 PCS

The dimension of the modules can be changed according to the demand of clients

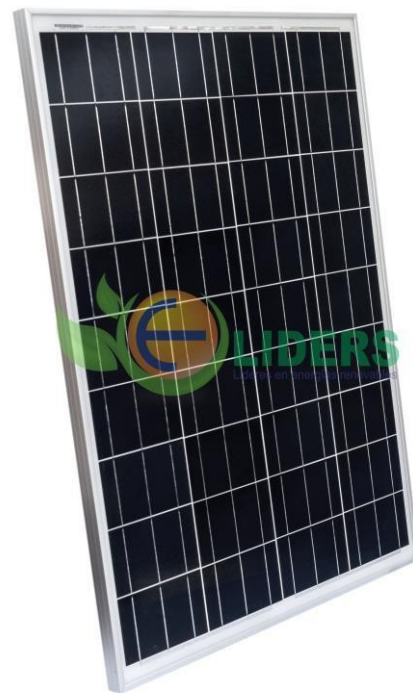

### Limits

Operating Temperature	-40 °C to +85°C
Storage Temperature	-40 °C to +85°C
Max System Voltage	700V

### Guarantee

Products Guarantee	5 yrs free from defects in materials and workmanship
Performance Guarantee	No less than 90% within 10yrs and no less than 80% within 20yrs
Certificates	TUV (IEC61215&IEC61730), CE

\* The data does not refer to a single module and it is not part of the offer, It is only for comparison only to different module types.

